

The Survitec logo features a stylized white 'S' icon followed by the word 'survitec' in a lowercase, sans-serif font.

# 380 GPM

INFLATABLE BOAT ↓

Survitec's DSB 380 GPM Inflatable Boat is exceptionally lightweight, due to its ultra-light hypalon fabric construction and smaller outboard engines. Engineered to SOLAS standards, the 380 GPM comprises of a skin and buoyancy tube manufactured from UV resistant hypalon with independent air compartments and safe, flush integrated valves.

The boat hull features an inflatable keel inserted into sleeve sections with single point inflation and combines operator-friendly, advanced performance with quick service capabilities and a durable and innovative design for up to six passengers.

## FEATURES

- DESIGN AND CONSTRUCTION BENCHMARKED AGAINST SOLAS RESCUE BOAT STANDARDS
- HEAVY DUTY CONSTRUCTION, MANUFACTURED FROM UV RESISTANT, ROBUST HYPALON FABRIC
- FULLY ADAPTABLE FOR A VARIETY OF APPLICATIONS INCLUDING FAST RESCUE, INFILTRATION AND EXTRACTION, AND COVERT MISSIONS
- CUSTOMIZABLE ACCESSORIES SUCH AS REINFORCEMENTS, HANDLES AND ROPES
- AVAILABLE WITH LOW NOISE BATTERY POWERED WHISPER ENGINE



Lightweight, superior  
build with intelligent  
inflation system



# 380 GPM


## INFLATABLE BOAT

Reinforced hypalon seams for increased durability

Optional anti-skid, wooden inflatable or aluminium flooring

Advanced bow design for increased internal space

Low weight for easier manoeuvrability

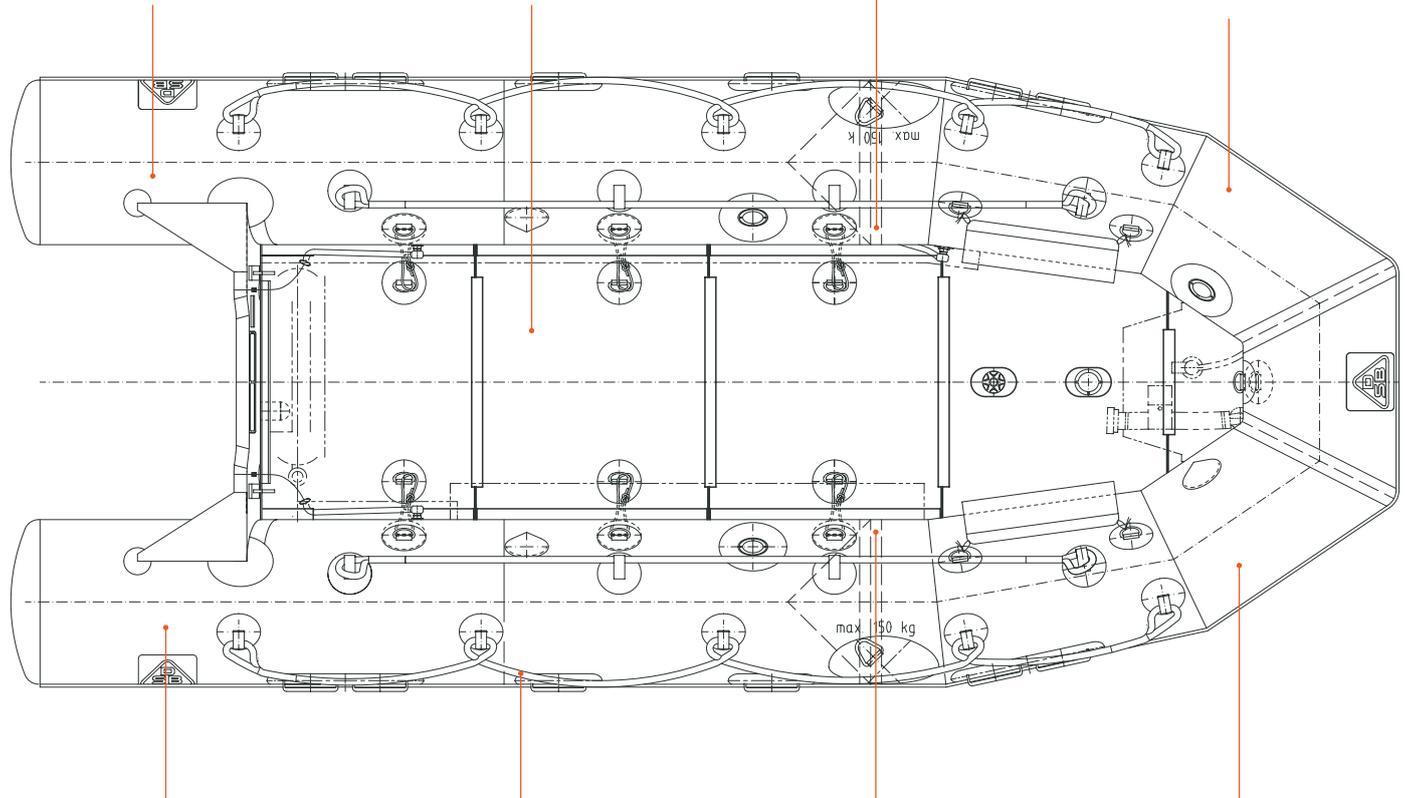

Low fuel consumption for increased operating time

Complete range of accessories available including handles, ropes etc.

Ultraviolet light and abrasion-resistant hypalon fender tube

Inflatable deep V-shaped keel for improved manoeuvrability

### Technical & Performance Information

TECHNICAL DATA	
Length overall (m)	3,800
Width overall (m)	1,670
Length inside (m)	2,695
Width inside (m)	0,760
Weight hull (kg)	51
Weight wood floor (kg)	41
Weight roll-up floor (kg)	32
Weight aluminium floor (kg)	39
Weight inflatable floor (kg)	9
Buoyancy chambers (Stk)	3
Max. Payload (kg)	830
Crew limit (Stk)	6

Max. Motorization (KW) / (PS)	29,4	40
Max. Weight motorization (single or twin) (kg)	115	
Buoyancy (m3)	1,22	
Boat inner surface (m2)	1,82	
Tube diameter (cm)	45,5	
Tube diameter bug (cm)	42	
Fabric	Hypalon 1670 dtex	



#### GET IN TOUCH

Phone +49 55 3430 1000

Fax +49 55 3430 1200

Email [info@survitecgroup.com](mailto:info@survitecgroup.com)

[www.survitecgroup.com](http://www.survitecgroup.com)

Angerweg 5, D-37632, Germany